

Section I

Watertight/Dust-Tight Products

INDEX

PAGE

Product Features

Watertight Products I-2

Plugs and Connectors

Watertight Straight Blade and Locking Devices I-3

Boxes and Covers

Portable Outlet Boxes and Weather Protective Covers I-4

Replacement Covers I-4




Watertight/Dust-Tight Products

Product Features



Watertight Devices

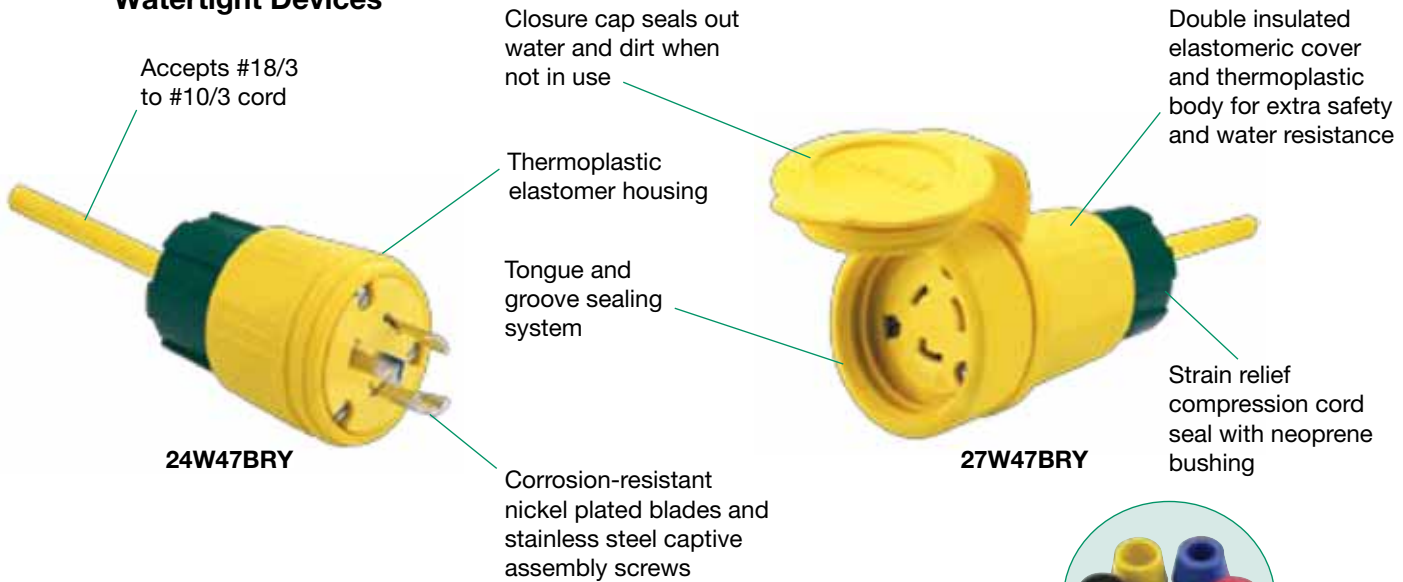

Extra Bushings

Color coded rubber cord sealing bushings supplied for diameter ranges .30-.91

Portable Outlet Box

Compression neoprene bushings seal out moisture (cord sizes #16/3 SO to #12/3 SO)

Self closing flip seals provide protection against moisture when closed



Large internal cavity for easy wiring of two duplex receptacles (not included)


3005BRY

Weather Protective Covers


Fiber reinforced polycarbonate for impact and chemical resistance

Weather resistant elastomeric seal

Available with or without receptacles

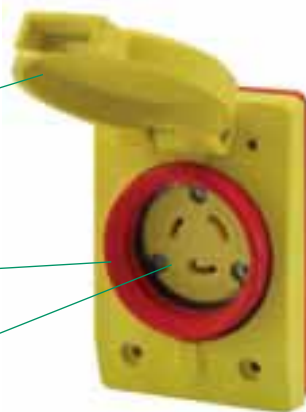

67W47BRY

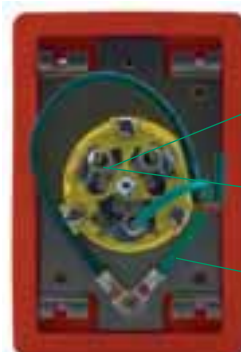

Back View

See-thru view for security

Large wiring chambers for easy termination

Pre-wired ground

- UL Listed and CSA Certified
- Meets NEC® requirements for “Wet and Damp Locations”
- NEMA type 4, 4X, 6, 6P
- Recommended where moisture exists
- Stainless steel captive assembly screws
- Nickel-plated contacts and blades
- Rugged thermoplastic interiors provide resistance to moisture and temperatures
- Keyed body and cover for proper alignment
- Tongue and groove plug to connector sealing system provides optimum protection
- High visibility — yellow thermoplastic elastomeric housing



14W47BRY



15W47BRY



28W76BRY



29W76BRY

STRAIGHT BLADE DEVICES





Amp	Volts	Poles / Wires	NEMA*	Catalog Number	
				Plug	Connector
15A	125V	2-pole 3-wire	5-15	14W47BRY	15W47BRY
	250V	2-pole 3-wire	6-15	14W49BRY	15W49BRY
20A	125V	2-pole 3-wire	5-20	14W33BRY	15W33BRY
	250V	2-pole 3-wire	6-20	14W48BRY	15W48BRY

LOCKING DEVICES

Amp	Volts	Poles / Wires	NEMA*	Catalog Number	
				Plug	Connector
15A	125V	2-pole 3-wire	L5-15	24W47BRY	25W47BRY
	250V	2-pole 3-wire	L6-15	24W49BRY	25W49BRY
20A	125V	2-pole 3-wire	L5-20	26W47BRY	27W47BRY
	125/250V	3-pole 4-wire	L14-20	26W74BRY	27W74BRY
	250V	2-pole 3-wire	L6-20	26W48BRY	27W48BRY
	250V 3Ø	3-pole 4-wire	L15-20	26W75BRY	27W75BRY
30A	480V 3Ø	3-pole 4-wire	L16-20	26W76BRY	27W76BRY
	125V	2-pole 3-wire	L5-30	28W47BRY	29W47BRY
	125/250V	3-pole 4-wire	L14-30	28W74BRY	29W74BRY
	250V	2-pole 3-wire	L6-30	28W48BRY	29W48BRY
	250V 3Ø	3-pole 4-wire	L15-30	28W75BRY	29W75BRY
	480V 3Ø	3-pole 4-wire	L16-30	28W76BRY	29W76BRY
	600V 3Ø	3-pole 4-wire	L17-30	28W77BRY	29W77BRY

Note: *For NEMA configurations, see pages R-2 for straight blade and R-3 for locking devices.

PRODUCT DIMENSIONS Inches (mm)



15 and 20 Amp Straight Blade
15 Amp Locking

20 Amp Locking

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

Watertight/Dust-Tight Products

Portable Outlet Boxes and Weather Protective Covers



Dust-Tight Boxes

- Non-conductive, impact resistant thermoplastic elastomer boxes reduce the exposure to potential hazards
- Automatic centering strain relief cord clamps
- IP45 environments



3000BRY



3005BRY

Water-Resistant Boxes

- Flip seals protect against wet environments when closed
- Neoprene seal bushings accommodate cord size #16/3 SO to #12/3 SO

Weather Protective Covers

- Meets NEC® requirements for “Wet and Damp Locations”
- Mounts to FS and FD boxes
- Self closing stainless steel spring loaded cover
- Weather resistant elastomeric seals around receptacles and plugs while in use

PORTABLE OUTLET BOXES / REPLACEMENT COVERS* Inches (mm)

Description	Box Depth Size	Catalog Number
Water-resistant; standard box	3.16 (80.3)	3005BRY
Water-resistant; extra deep box	4.17 (105.9)	3085BRY
Dust-tight; standard box	3.16 (80.3)	3000BRY
Dust-tight; extra deep box	4.17 (105.9)	3080BRY
Replacement duplex flip cover	—	3017BRY
Replacement single receptacle flip cover	—	3018BRY
Replacement GFCI flip cover	—	3019BRY

Note: *Portable boxes not UL Listed or CSA Certified.
Receptacles sold separately. See sections A and H for straight blade and locking devices.

WEATHER PROTECTIVE COVERS

Description	Amp / Volts	NEMA	Catalog Number
Cover and seal; excludes receptacle; for use with 15 and 20 amp straight blade single and 15 amp locking receptacles	15A or 20A	—	6500BRY
Cover; seal; and receptacle assembly	15A 125V	5-15R	60W47BRY
Cover; seal; and receptacle assembly	20A 125V	5-20R	65W47BRY
Cover and seal; excludes receptacle; for use with 20 and 30 amp locking single receptacles; 3-wire only	20A or 30A	—	6700BRY
Cover; seal; and locking receptacle assembly	20A 125V	L5-20R	67W47BRY
Cover and seal; excludes receptacle; for use with 30 amp locking single receptacles; 4-wire only	30A	—	6800BRY




60W47BRY



67W47BRY

PRODUCT DIMENSIONS Inches (mm)

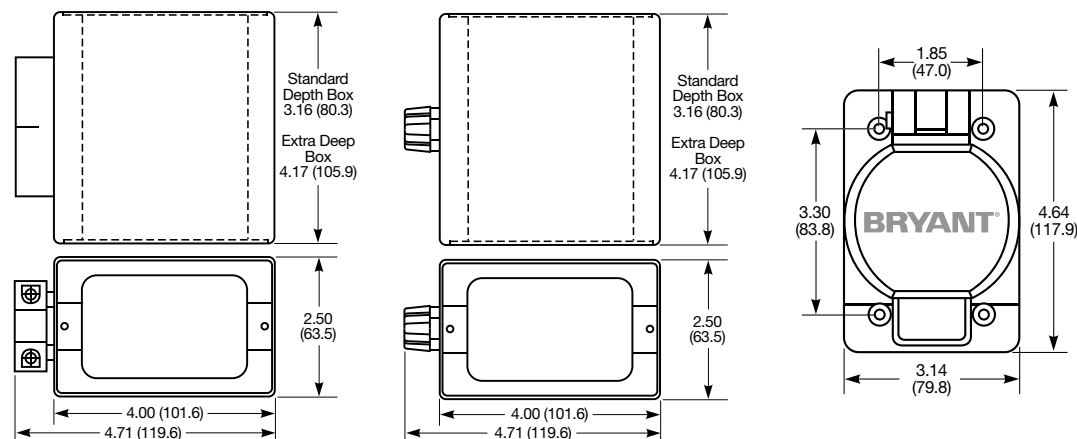

NEC® is a registered trademark of the National Fire Protection Association (NFPA).